

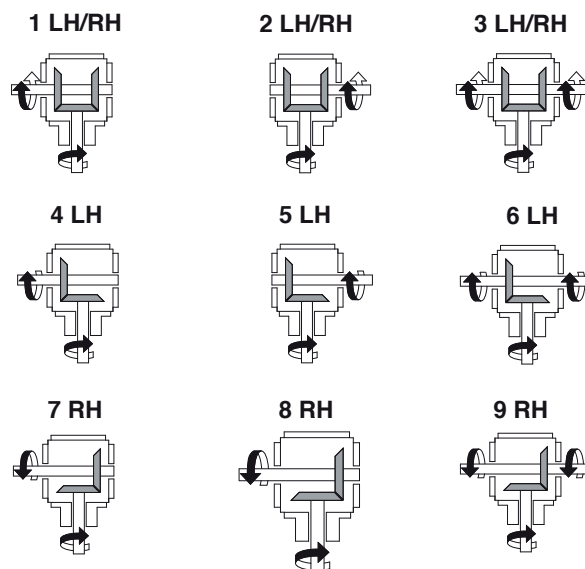
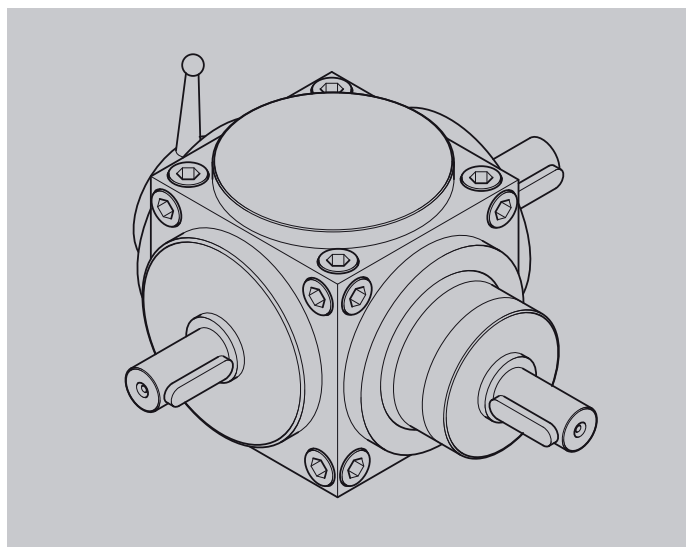
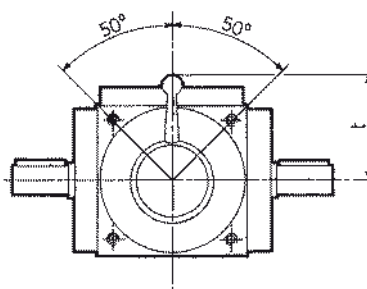
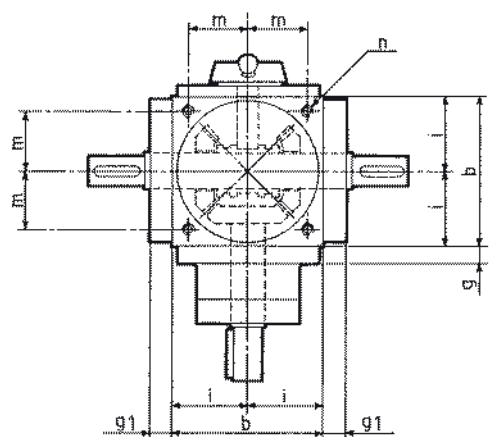


INVERTITORE DI MARCIA ALTERNATIVO Tipo DI

Type DI ALTERNATIVE REVERSE GEARS

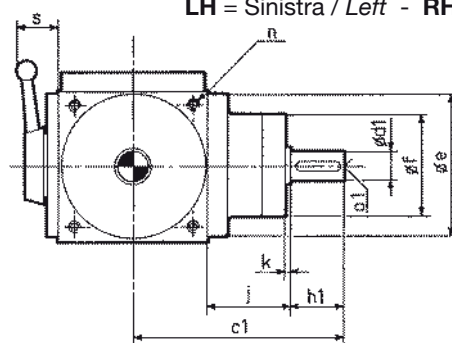

LH = Sinistra / Left - RH = Destra / Right

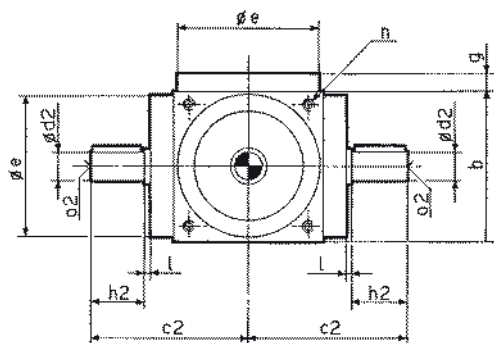

Rapporti di riduzione

1:1 - 1,5:1 - 2:1

Reduction ratios

TIPO Type	b	ϕe h7	ϕf	$\phi d1$ j6	h1	$\phi d2$ j6	h2	i	c1	c2	g	g1	i	k	l	m	n	o1-o2	s	t	d1-d2 chiave DIN 6885 p.1 d1-d2 spline DIN 6885 p.
55 DI	110	108	81	22	40	22	40	55	150	117	10	20	55	2	2	M8	44	M8	56	117	6 - 6 - 35
70 DI	140	135	98	32	50	32	50	70	180	142	10	20	60	2	2	M12	55	M12	56	117	10 - 8 - 45
85 DI	170	165	118	40	60	40	60	85	215	170	12	22	70	2	2	M12	67	M16	56	117	12 - 8 - 55
105 DI	210	205	128	45	70	45	70	105	260	202	15	25	85	2	2	M16	85	M16	56	117	14 - 9 - 65
120 DI	240	235	138	55	85	55	85	120	300	232	15	25	95	2	2	M16	95	M20	56	117	16 - 10 - 80
140 DI	280	275	150	60	110	60	110	140	360	277	15	25	110	2	2	M16	110	M20	56	117	18 - 11 - 100